

5050 Flexistrip

IP20 Rated, 30 LEDs Per Metre





Product Description:

Description:	Product Code:	LEDs p/m	LED Spacing	Lumens (lm/m)	Wattage
IP20 5050 30 Red	DM-5050FS15-12R	30	33.3mm	135-165	7.2W p/m
IP20 5050 30 Green	DM-5050FS15-12G	30	33.3mm	220-260	7.2W p/m
IP20 5050 30 Blue	DM-5050FS15-12B	30	33.3mm	60-90	7.2W p/m
IP20 5050 30 Yellow	DM-5050FS15-12Y	30	33.3mm	135-165	7.2W p/m
IP20 5050 30 WW	DM-5050FS15-12WW	30	33.3mm	450-480	7.2W p/m
IP20 5050 30 PW	DM-5050FS15-12PW	30	33.3mm	420-450	7.2W p/m

Features:

- Easy to install and maintain with a long lifespan.
- Energy saving and environmentally friendly.
- Very Flexible, easy curved and available in various colours.
- Wide beam angle.
- LED strip on flexible printed circuit board with self adhesive backing.
- Each unit of 3 LEDs can be cut in segment without damaging the remaining strip.

Product Detail:

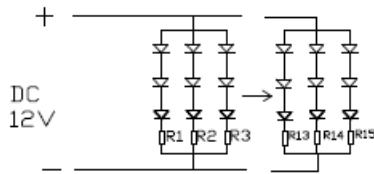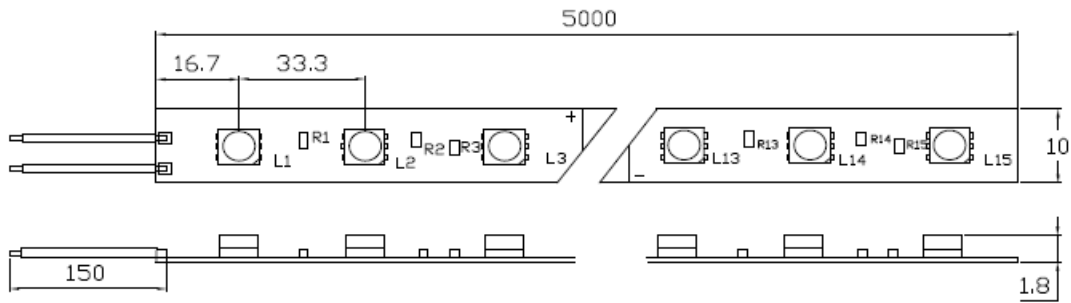

Reel length:	5m
PCB Thickness:	0.25mm
PCB Material:	Polymide
Beam Angle:	120
Life Span:	50,000Hs
Storage Temperature:	Minus 40 to 80 degrees.
Maximum power per roll:	36W
Maximum connection length:	5m
Certification:	CE/ROHS
Operating temperature:	Minus 30 to 60 degrees.
Operating voltage:	12DC



12V



Approx.
life span
50,000 hours



5m
reel



CRI >70



Certification:
CE
RoHS compliant



Beam
Angle



2 year
warranty



Triple Chip: