

# 5050 Flexistrip

IP65 Rated, 30 LEDs Per Metre




## Product Description:

Description:	Product Code:	LEDs p/m	LED Spacing	Lumens (lm/m)	Wattage
IP65 5050 30 Red	DM-5050FS15RG-12R	30	33.3mm	115-145	7.2W p/m
IP65 5050 30 Green	DM-5050FS15RG-12G	30	33.3mm	195-230	7.2W p/m
IP65 5050 30 Blue	DM-5050FS15RG-12B	30	33.3mm	50-75	7.2W p/m
IP65 5050 30 Yellow	DM-5050FS15RG-12Y	30	33.3mm	115-145	7.2W p/m
IP65 5050 30 WW	DM-5050FS15RG-12WW	30	33.3mm	400-420	7.2W p/m
IP65 5050 30 PW	DM-5050FS15RG-12PW	30	33.3mm	375-400	7.2W p/m

## Features:

- Easy to install and maintain with a long lifespan.
- Energy saving and environmentally friendly.
- Very Flexible, easy curved and available in various colours.
- Wide beam angle.
- LED strip on flexible printed circuit board with self adhesive backing.
- Each unit of 3 LEDs can be cut in segment without damaging the remaining strip.

## Product Detail:

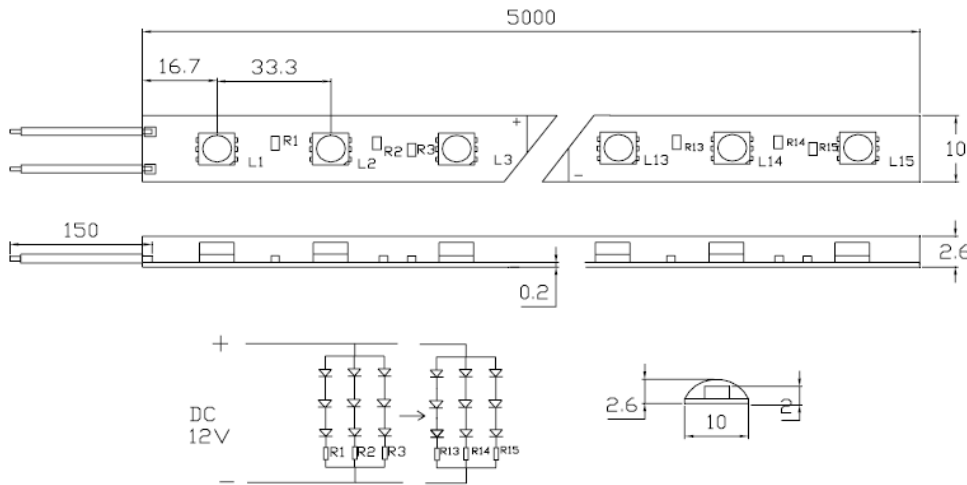

<b>Reel length:</b>	5m
<b>PCB Thickness:</b>	0.25mm
<b>PCB Material:</b>	Polymide
<b>Beam Angle:</b>	120
<b>Life Span:</b>	50,000Hs
<b>Storage Temperature:</b>	Minus 40 to 80 degrees.
<b>Maximum current per metre:</b>	0.6
<b>Maximum current per roll:</b>	3A
<b>Maximum power per roll:</b>	36W
<b>Maximum connection length:</b>	5m
<b>Certification:</b>	CE/ROHS
<b>Operating temperature:</b>	Minus 30 to 60 degrees.
<b>Operating voltage:</b>	12DC

