

5050 Flexistrip

IP65 Rated, 60 LEDs Per Metre




Product Description:

Description:	Product Code:	LEDs p/m	LED Spacing	Lumens (lm/m)	Wattage
IP65 5050 60 Red	DM-5050FS30RG-12R	60	16.67mm	230-300	14.4W p/m
IP65 5050 60 Green	DM-5050FS30RG-12G	60	16.67mm	400-460	14.4W p/m
IP65 5050 60 Blue	DM-5050FS30RG-12B	60	16.67mm	100-150	14.4W p/m
IP65 5050 60 Yellow	DM-5050FS30RG-12Y	60	16.67mm	230-300	14.4W p/m
IP65 5050 60 WW	DM-5050FS30RG-12WW	60	16.67mm	800-840	14.4W p/m
IP65 5050 60 PW	DM-5050FS30RG-12PW	60	16.67mm	750-800	14.4W p/m

Features:

- Easy to install and maintain with a long lifespan.
- Energy saving and environmentally friendly.
- Very Flexible, easy curved and available in various colours.
- Wide beam angle.
- LED strip on flexible printed circuit board with self adhesive backing.
- Each unit of 3 LEDs can be cut in segment without damaging the remaining strip.

Product Detail:

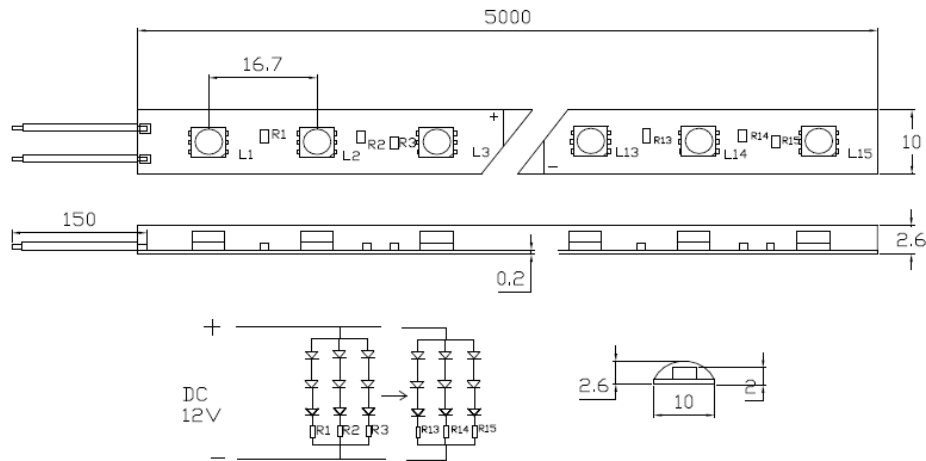


Reel length:	5m
PCB Thickness:	0.25mm
PCB Material:	Polymide
Beam Angle:	120
Life Span:	50,000Hs
Storage Temperature:	Minus 40 to 80 degrees.
Maximum current per metre:	1.2A
Maximum current per roll:	6A
Maximum power per roll:	72W
Maximum connection length:	5m
Certification:	CE/ROHS
Operating temperature:	Minus 30 to 60 degrees.
Operating voltage:	12DC



12V



Approx.
life span
50,000 hours



5m
reel



CRI >70



Certification:
CE
RoHS compliant



Beam
Angle



2 year
warranty



Triple Chip: