

5050 Flexistrip

IP20 Rated, 60 LEDs Per Metre




Product Description:

Description:	Product Code:	LEDs p/m	LED Spacing	Lumens (lm/m)	Wattage
IP20 5050 60 Red	DM-5050FS30-12R	60	16.67mm	270-330	14.4W p/m
IP20 5050 60 Green	DM-5050FS30-12G	60	16.67mm	440-520	14.4W p/m
IP20 5050 60 Blue	DM-5050FS30-12B	60	16.67mm	120-180	14.4W p/m
IP20 5050 60 Yellow	DM-5050FS30-12Y	60	16.67mm	270-330	14.4W p/m
IP20 5050 60 WW	DM-5050FS30-12WW	60	16.67mm	900-960	14.4W p/m
IP20 5050 60 PW	DM-5050FS30-12PW	60	16.67mm	840 - 900	14.4W p/m

Features:





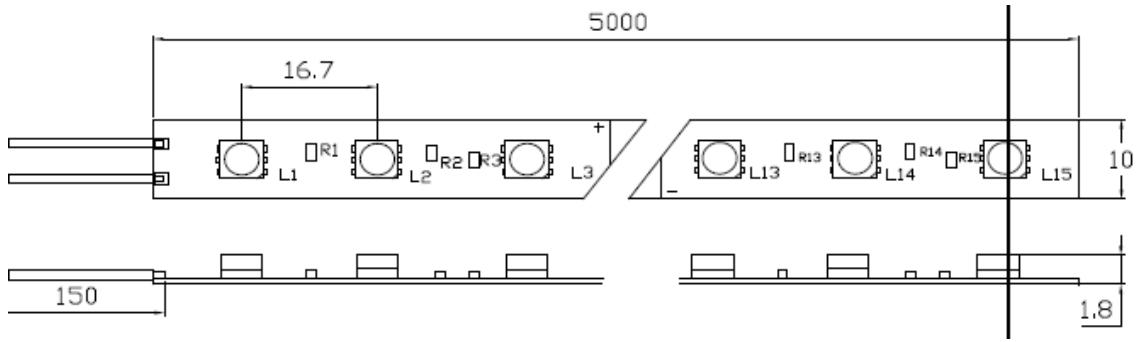



- Easy to install and maintain with a long lifespan.
- Energy saving and environmentally friendly.
- Very Flexible, easy curved and available in various colours.
- Wide beam angle.
- LED strip on flexible printed circuit board with self adhesive backing.
- Each unit of 3 LEDs can be cut in segment without damaging the remaining strip.

Product Detail:



Reel length:	5m
PCB Thickness:	0.25mm
PCB Material:	Polymide
Beam Angle:	120
Life Span:	50,000Hs
Storage Temperature:	Minus 40 to 80 degrees.
Maximum current per metre:	1.2A
Maximum current per roll:	6A
Maximum power per roll:	72W
Maximum connection length:	5m
Certification:	CE/ROHS
Operating temperature:	Minus 30 to 60 degrees.
Operating voltage:	12DC

Product Pricing:

 12V	 Approx. life span 50,000 hours	 5m reel	 CRI >70
 Certification: CE RoHS compliant	 Beam Angle 120°	 2 year warranty	 Triple Chip:

